



Oil-Fired

Commercial Water Heaters

Featuring...




Turboflue[®] heat exchanger

- ◆ Energy-Saving Turbofins conduct more heat into water
- ◆ Robust single-flue design yields a stronger, more durable tank


- ◆ 68 to 113 gallon capacities
- ◆ 155,000 to 623,000 BTU
- ◆ C^gglass[®] Cobalt-enriched glass-lined tank
- ◆ Dual magnesium anode rods to inhibit corrosion
- ◆ Standard & ASME construction

3-Year limited warranty on commercial installations


This product is available from:

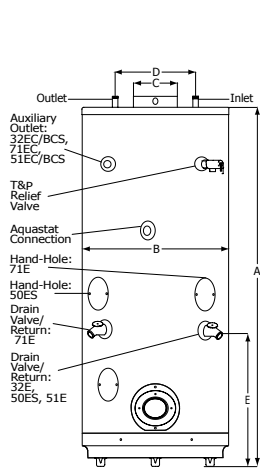

71E

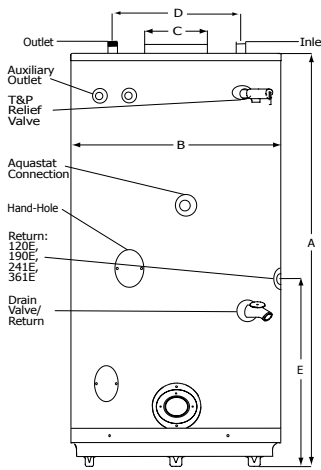

72E, 73E, 120E,
190E, 241E, 361E

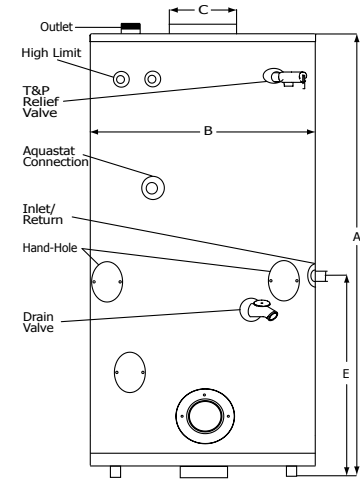

541E

Model	Storage GAL (L)	Rated Input BTU/HR (kW)	Recovery @ Δ 90°F (32° C) GAL/HR (L/HR)	Max. Temp Setting °F (°C)	Inlet Pipe Dia. NPT	Outlet Pipe Dia. NPT	Return Pipe Dia. NPT	Dimensions in Inches (cm)					Shipping Weight LBS (kg) ***	
								A	B	C	D	E	Standard	ASME
								71E	68 (257.41)	173,000 (50.70)	177 (670.02)	160** (71.11)	1.00	1.50*
72E	67 (253.62)	199,000 (58.32)	212 (802.51)	160** (71.11)	1.50	1.50*	1.50*	58.00 (147.33)	28.00 (71.12)	8.00 (20.32)	16.00 (40.64)	N/A	520 (235.87)	N/A
73E	67 (253.62)	242,000 (70.92)	258 (976.64)	180 (82.22)	1.50	1.50*	1.50*	58.00 (147.32)	28.00 (71.12)	8.00 (20.32)	16.00 (40.64)	N/A	520 (235.87)	N/A
120E	113 (427.75)	155,000 (45.43)	163 (617.02)	180 (82.22)	1.00	2.00	2.00	67.00 (170.18)	31.50 (80.01)	6.00 (15.24)	19.00 (48.26)	22.00 (55.88)	660 (299.37)	N/A
190E	113 (427.75)	190,000 (55.68)	199 (753.30)	180 (82.22)	1.00	2.00	2.00	67.00 (170.18)	31.50 (80.01)	6.00 (15.24)	19.00 (48.26)	22.00 (55.88)	660 (299.37)	N/A
241E	109 (412.61)	277,000 (81.18)	286 (1,082.63)	180 (82.22)	1.50	2.00	2.00	67.00 (170.18)	31.50 (80.01)	8.00 (20.32)	19.00 (48.26)	22.00 (55.88)	890 (403.70)	930 (421.84)
361E	91 (344.47)	415,000 (121.62)	443 (1,676.94)	180 (82.22)	1.00	2.00	2.00	67.00 (170.18)	31.50 (80.01)	9.00 (22.86)	23.00 (58.42)	26.00 (66.04)	1065 (483.08)	1085 (492.15)
541E	83 (314.19)	623,000 (182.58)	648 (2,452.95)	180 (82.22)	2.00	2.00	2.00	66.00 (167.64)	34.00 (86.36)	10.00 (25.40)	N/A	30.50 (77.47)	1290 (585.13)	1310 (594.21)

*Nipple not included
 **Optional setting, contact factory
 ***Weight does not include burner and controls

T&P valve and brass drain valve factory installed
 Standard Voltage (all): 120V, 60 Hz, 1P
 Working Pressure: 150 psi (1034 kPa); Test Pressure: 300 psi (2068 kPa)
 All Bock products meet or exceed current ASHRAE standards.

Warning: Do not install on combustible flooring. Installation should be in accordance with all national and/or local codes. In the absence of local codes, refer to NFPA 31 or ANSI Z.21.10.1.

Caution: The recommended maximum hot water temperature setting for normal residential use is 120°F. Bock recommends a tempering valve or anti-scald valve be installed and used according to the manufacturer's directions to prevent scalding.



(on selected models)



www.bockwaterheaters.com
 110 South Dickinson Street, Madison, Wisconsin 53703
 Toll Free 800-794-2491 • Phone 608-257-2225 • Fax 608-257-5304

