



# Power Gas

## Residential Water Heaters

### Featuring...






### **Turboflue<sup>®</sup>** heat exchanger

- ◆ Energy-Saving Turbofans conduct more heat into water
- ◆ Robust single-flue design yields a stronger, more durable tank
- ◆ 32 to 113 gallon capacities
- ◆ 104,000 to 173,000 BTU/HR
- ◆ *C<sub>2</sub>glass<sup>®</sup>* cobalt-enriched glass-lined tank
- ◆ Dual magnesium anode rods to inhibit corrosion
- ◆ Barometric draft control furnished with all models
- ◆ Propane gas available on request
- ◆ Power gas burner with spark ignition, 100% safety shut-off
- ◆ **5-year limited warranty**

***All-American Product***



This product is available from:

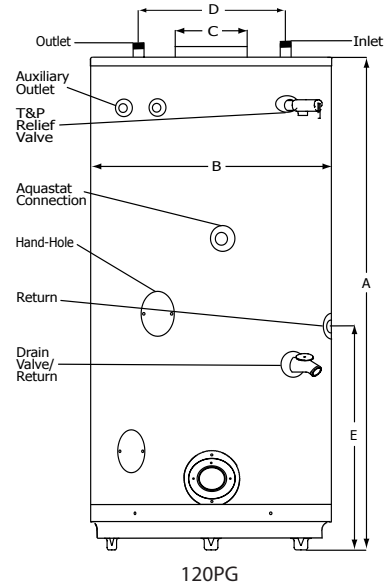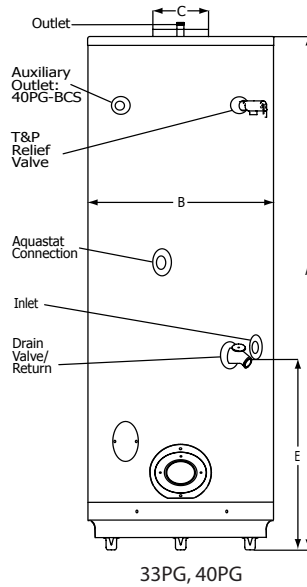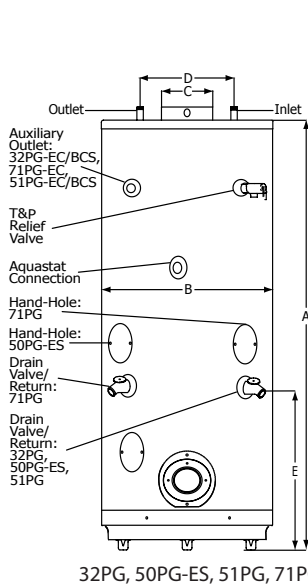

Model	Storage GAL (L)	Rated Input BTU/HR (kW)	Recovery @ Δ 90°F (32° C) GAL/HR (L/HR)	Max. Temp Setting °F (°C)	Inlet Pipe Dia. NPT	Outlet Pipe Dia. NPT	Return Pipe Dia. NPT	Dimensions in Inches (cm)					Shipping Weight LBS (kg)	
								A	B	C	D	E	Standard	ASME
32PG	32 (121.13)	104,000 (30.48)	110 (416.40)	160 (71.11)	.75	.75	.75	51.00 (129.54)	20.00 (50.80)	6.00 (15.24)	11.00 (27.94)	17.00 (43.18)	225 (102.06)	N/A
33PG	33 (124.92)	104,000 (30.48)	109 (412.61)	160 (71.11)	.75	.75	.75	43.25 (109.86)	24.00 (60.96)	6.00 (15.24)	N/A	17.25 (43.82)	235 (106.59)	N/A
40PG	40 (151.42)	126,000 (36.93)	134 (507.25)	160 (71.11)	.75	.75	1.00	61.00 (154.94)	20.00 (50.80)	6.00 (15.24)	N/A	18.00 (45.72)	260 (117.93)	N/A
50PG-ES	50 (189.27)	140,000 (41.03)	142 (537.53)	160** (71.11)	1.00	1.50	1.50	52.00 (132.08)	26.00 (66.04)	6.00 (15.24)	13.50 (34.29)	18.50 (46.99)	305 (138.35)	N/A
51PG	50 (189.27)	152,000 (44.55)	159 (601.88)	160** (71.11)	1.00	1.00	.75	59.00 (149.86)	24.00 (60.96)	6.00 (15.24)	11.00 (27.94)	18.00 (45.72)	305 (138.35)	N/A
71PG	68 (257.41)	173,000 (50.70)	170 (643.52)	160** (71.11)	1.00	1.50*	1.50*	66.00 (167.64)	26.00 (66.04)	6.00 (15.24)	13.50 (34.29)	22.00 (55.88)	355 (161.03)	N/A
120PG	113 (427.75)	155,000 (45.43)	160 (605.67)	180 (82.22)	1.00	2.00	2.00	67.00 (170.18)	31.50 (80.01)	6.00 (15.24)	19.00 (48.26)	22.00 (55.88)	660 (299.37)	N/A

No field conversion kits available.  
Burner protrudes 12" - 14" from tank depending on make and model. Contact Bock for burner detail dimensions.

\*Nipple not included  
\*\*Optional setting, contact factory

T&P valve and brass drain valve factory installed  
Standard Voltage (all): 120V, 60 Hz, 1P  
Working Pressure: 150 psi (1034 kPa); Test Pressure: 300 psi (2068 kPa)  
All Bock products meet or exceed current ASHRAE standards.

**Warning:** Do not install on combustible flooring. Installation should be in accordance with all national and/or local codes. In the absence of local codes, refer to NFPA 54 or ANSI Z.21.10.1.

**Caution:** The recommended maximum hot water temperature setting for normal residential use is 120°F. Bock recommends a tempering valve or anti-scald valve be installed and used according to the manufacturer's directions to prevent scalding.



(on selected models)



[www.bockwaterheaters.com](http://www.bockwaterheaters.com)  
110 South Dickinson Street, Madison, Wisconsin 53703  
Toll Free 800-794-2491 • Phone 608-257-2225 • Fax 608-257-5304

