



EZFIT

Bock 76,000 BTU/HR

Non-Dampered Commercial Gas Water Heaters

*ideal for large residences, small restaurants, apartment buildings,
office complexes, dairy barns, salons, barbershops,
and many other facilities*

- ◆ 70°F to 180°F settable temperature
- ◆ 75 and 100 gallon capacities
- ◆ Standing pilot - no electricity required
- ◆ Natural gas or propane atmospheric burners
- ◆ **Five-year limited tank warranty**
- ◆ Glass-fused-to-steel tank interior
- ◆ Two Magnesium Anode Rods
- ◆ 2" Non-CFC Foam Insulation
- ◆ Factory installed T&P relief valve
- ◆ Brass drain valve
- ◆ Optional leg-extensions to raise heater





Turboflue[®]

heat exchanger

- ◆ Energy-Saving Turbofins conduct more heat into water
- ◆ Robust single-flue design yields a stronger, more durable tank



This product is available from:

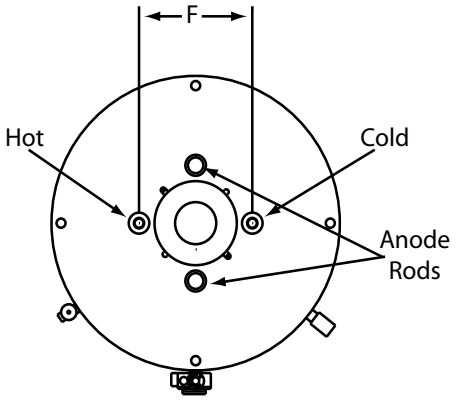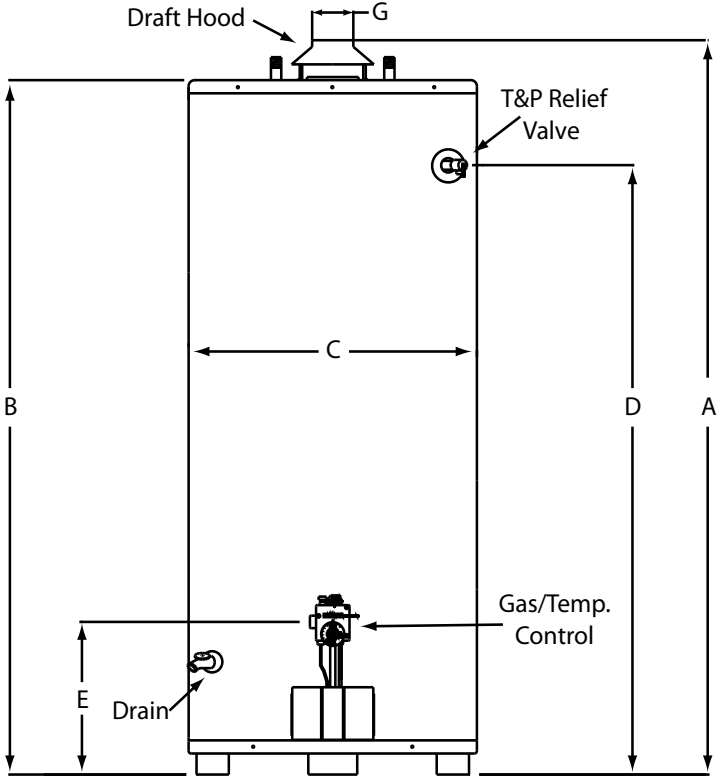

Model	Storage GAL (L)	Rated Input BTU/HR (kW)	Recovery @ 100°F Rise GAL/HR (L/HR)	1st Hr. Del. @ 100°F Rise GAL (L)	Dimensions in Inches (cm)						Inlet Conn. Dia. NPT	Outlet Conn. Dia. NPT	Gas Conn. Dia. NPT	Shipping Weight LBS (kg)	
					A	B	C	D	E	F					G
EZ 75-76N	75 (283.91)	76,000 (22.27)	73 (276.34)	133 (503.50)	69.19 (175.74)	65.38 (166.07)	26.00 (66.04)	58.25 (147.96)	14.50 (36.83)	11.00 (27.94)	4.00 (10.16)	1.00	1.00	0.50	391 (177.35)
EZ 100-76N	100 (379.54)	76,000 (22.27)	73 (276.34)	153 (579.17)	69.81 (177.32)	66.00 (167.64)	28.00 (71.12)	57.94 (147.17)	14.50 (36.83)	11.00 (27.94)	4.00 (10.16)	1.00	1.00	0.50	485 (219.99)

For LP models change suffix "N" to "LP"

Working Pressure: 150 psi (1034 kPa)
Test Pressure: 300 psi (2068 kPa)
 For natural gas: manifold pressure = 4" w.c. (1.00 kPa); Inlet pressure range = 5 - 14" w.c. (1.25-3.49 kPa)
 For propane gas: manifold pressure = 10" w.c. (2.49 kPa); Inlet pressure range = 11 - 14" w.c. (2.74-3.49 kPa)
T&P valve factory installed



All Bock products meet or exceed current ASHRAE standards. These products are design certified by UL (Underwriters Laboratories) and meet ANSI Z21.10.3/CSA 4.3 requirements for operation up to 180°F (82°C). Approved for use as an automatic circulating tank water heater or automatic storage water heater.

Warning: Do not install on combustible flooring. Installation should be in accordance with all national and/or local codes. In the absence of local codes, refer to NFPA 54 or ANSI Z21.10.3

Caution: The recommended maximum hot water temperature setting for normal residential use is 120°F (49°C). Bock recommends a tempering valve or anti-scald valve be installed and used according to the manufacturer's directions to prevent scalding.



www.bockwaterheaters.com
 110 South Dickinson Street, Madison, Wisconsin 53703
 Toll Free 800-794-2491 • Phone 608-257-2225 • Fax 608-257-5304

