




Solar Heated Water Storage With Supplemental Electric Heat



- ◆ *Ciglass*[®] - porcelain fused-to-steel is impervious to chlorine and caustics - ***the ideal water vessel***
- ◆ 4500W electric heating element
- ◆ 80 and 119 gallon capacities
- ◆ 3/4" NPT connections
- ◆ 2" Non-CFC zero ozone depleting foam insulation
- ◆ Solar sensor well (accepts 6mm probe)
- ◆ Factory installed T&P valve
- ◆ Factory installed brass drain valve
- ◆ Top and side water connections
- ◆ Two magnesium anodes
- ◆ Steel exterior with powder coat finish
- ◆ 6-Year tank warranty - residential applications
- ◆ 3-Year tank warranty - non-residential applications

EnviroStor[™]

This product is available from:

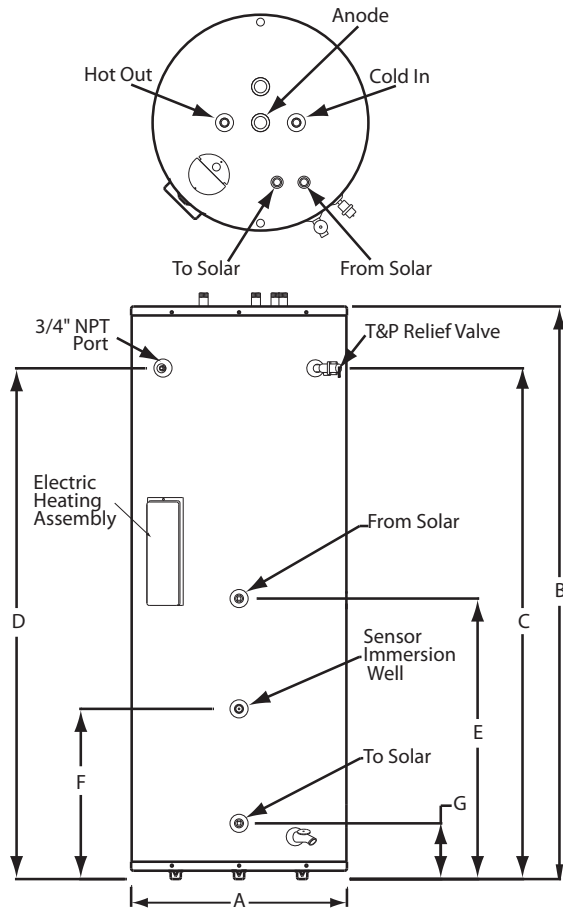

| Model | Storage GAL (L) | Domestic Water Conn. NPT | Solar Water Conn. NPT | Dimensions in Inches (cm) | | | | | | | Shipping Weight LBS (kg) |
|--------|-----------------|--------------------------|-----------------------|---------------------------|----------------|----------------|----------------|---------------|---------------|--------------|--------------------------|
| | | | | A | B | C | D | E | F | G | |
| 80STE | 80 (302.83) | .75 | .75 | 24.00 (60.96) | 64.00 (162.56) | 57.12 (145.08) | 57.12 (145.08) | 31.50 (80.01) | 19.25 (48.90) | 6.50 (16.51) | 252 (114.31) |
| 119STE | 119 (450.46) | .75 | .75 | 28.00 (71.12) | 65.00 (165.10) | 57.75 (146.69) | 57.75 (146.69) | 33.75 (85.73) | 16.25 (41.28) | 8.75 (22.23) | 382 (173.27) |

Electrical Rating: 4.5KW, 240V

Warning: Installation should be in accordance with all national and/or local codes. In the absence of local codes, refer to NFPA 54 or ANSI Z21.10.1.

Caution: The recommended maximum hot water temperature setting for normal residential use is 120° F. Manufacturer recommends a tempering valve or anti-scald valve be installed and used according to the manufacturer’s directions to prevent scalding.

Pressures (all): Working Pressure, 150 psi; Testing Pressure, 300 psi

110 South Dickinson Street, Madison, Wisconsin 53703
Phone 608.257-2225 • Fax 608.257.5304 • www.bockwaterheaters.com