



Solar Water Heater

Featuring...






High Capacity 1.5" Internal Coil Heat Exchanger with Optional 4500W Supplemental Electric Heating Element and Second Coil Heat Exchanger for Auxiliary Heat Source

- ◆ *C^oglass[®]* - porcelain fused-to-steel is impervious to chlorine and caustics - *the ideal water vessel*
- ◆ 50 to 119 gallon capacities
- ◆ 4500W electric heating element
- ◆ 1" NPT connections
- ◆ 2" Non-CFC zero ozone depleting foam insulation
- ◆ Steel exterior with powder coat finish
- ◆ Two magnesium anodes
- ◆ Factory installed brass drain valve
- ◆ Factory installed T&P valve
- ◆ Precision manufactured tank - high quality steel to assure strength and durability
- ◆ 6-Year tank and heat exchanger warranty - residential application
- ◆ 3-Year tank and heat exchanger warranty - non-residential application



EnviroStortm

This product is available from:

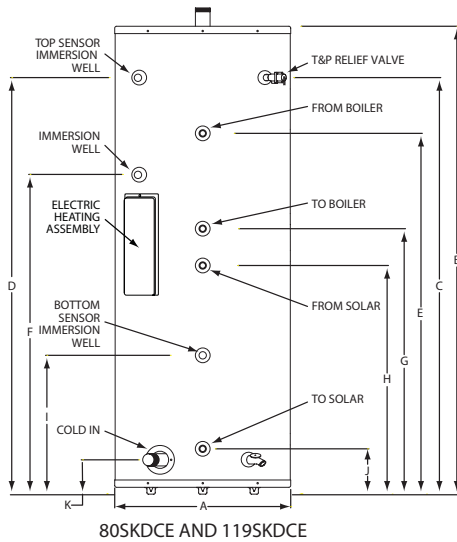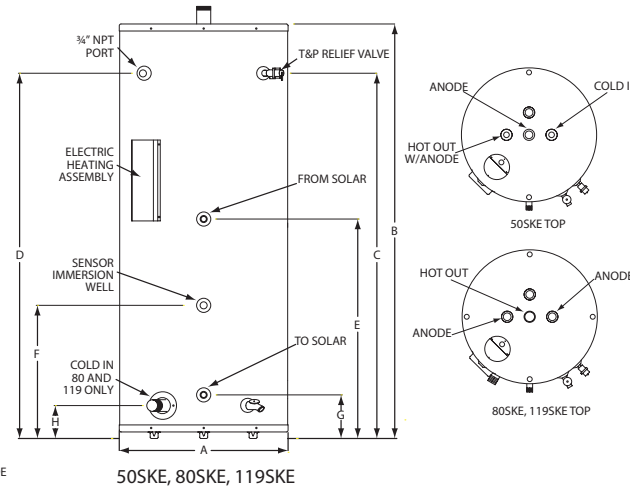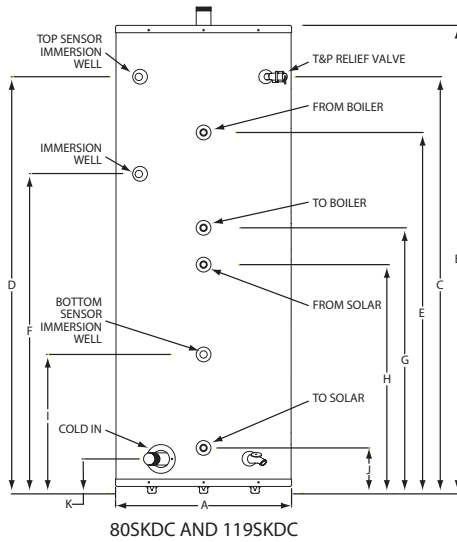

Model	Electric Element	Number of Coils	Storage (gal)	Dimensions											Shipping Weight (lbs)
				A	B	C	D	E	F	G	H	I	J	K	
50SKE	X	1	45	22"	48 1/4"	39 3/4"	39 3/4"	31 1/2"	16 3/4"	6 1/2"	N/A	N/A	N/A	N/A	241
80SKE	X	1	75	24"	64"	57 1/8"	57 1/8"	31 1/2"	19 1/4"	6 1/2"	5"	N/A	N/A	N/A	307
80SKDC		2	73	24"	64"	57 1/8"	57 1/8"	49 1/2"	46 7/8"	36 1/2"	31 1/2"	19 1/4"	6 1/2"	5"	327
80SKDCE	X	2	73	24"	64"	57 1/8"	57 1/8"	49 1/2"	46 7/8"	36 1/2"	31 1/2"	19 1/4"	6 1/2"	5"	337
119SKE	X	1	110	28"	65"	57 3/4"	57 3/4"	33 3/4"	16 1/4"	8 3/4"	6 1/2"	N/A	N/A	N/A	407
119SKDC		2	108	28"	65"	57 3/4"	57 3/4"	51 3/4"	49 1/8"	38 3/4"	33 3/4"	16 1/4"	8 3/4"	6 1/2"	427
119SKDCE	X	2	108	28"	65"	57 3/4"	57 3/4"	51 3/4"	49 1/8"	38 3/4"	33 3/4"	16 1/4"	8 3/4"	6 1/2"	437

Warning: Installation should be in accordance with all national and/or local codes. In the absence of local codes, refer to NFPA 54 or ANSI Z21.10.1.

Caution: The recommended maximum hot water temperature setting for normal residential use is 120°F. Manufacturer recommends a tempering valve or anti-scald valve be installed and used according to the manufacturer's directions to prevent scalding.

Pressures (all): Working pressure, 150 psi; testing pressure, 300 psi

Electrical Rating: ("E" models only): 4.5KW, 240V

110 South Dickinson Street, Madison, Wisconsin 53703
Phone 608.257-2225 • Fax 608.257.5304 • www.bockwaterheaters.com

ES102 SK Rev 1/09