

# BOCK

## WATER HEATERS

### Oil-Fired, Power Gas or Dual-Fuel Commercial Water Heaters


■ Three-Year Limited Tank Warranty

- 400,000 to 1,500,000 BTU/hr
- 157 to 271 gallon capacities
- Wet Leg Design - combustion chamber is surrounded by water on all sides for continuous operation and additional heat transfer
- Glass-fused-to-steel water tank
- Multiple magnesium anode rods  
- From 4 to 11 by model to inhibit corrosion
- Integrated steel skid for safe and easy movement
- Large handhole cleanouts are standard
- Power gas, oil and dual-fuel burners
- ASME construction
- One-year limited parts warranty

#### Turboflue® High Performance Heat Exchanger:

- Patented helical-fin multi-stage design
- Superior heat conduction and fuel efficiency

Made in the USA

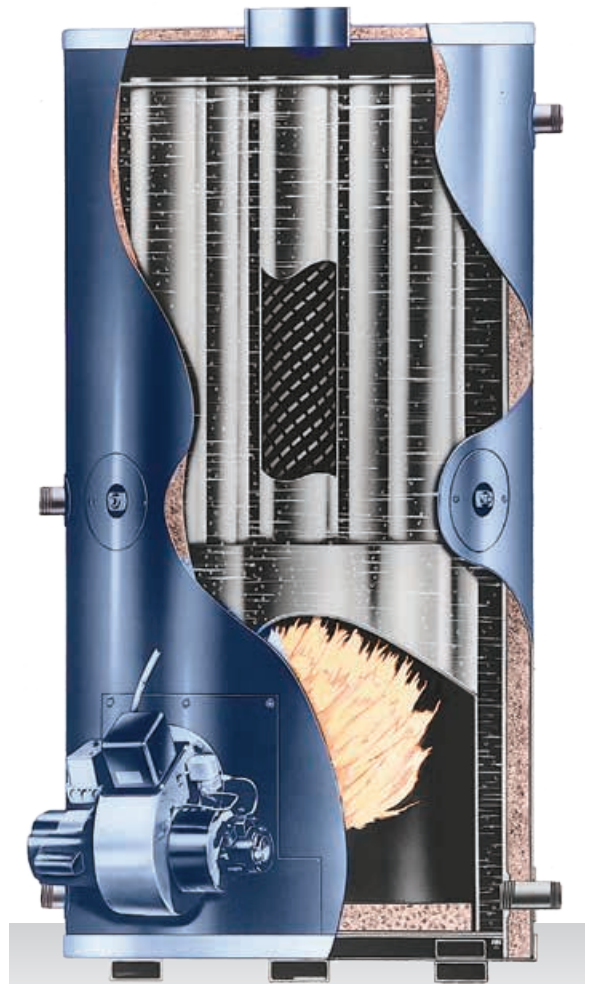


# COMMERCIAL

• HIGH BTU •

WE TAKE WATER HEATERS PERSONALLY

This product is available from:

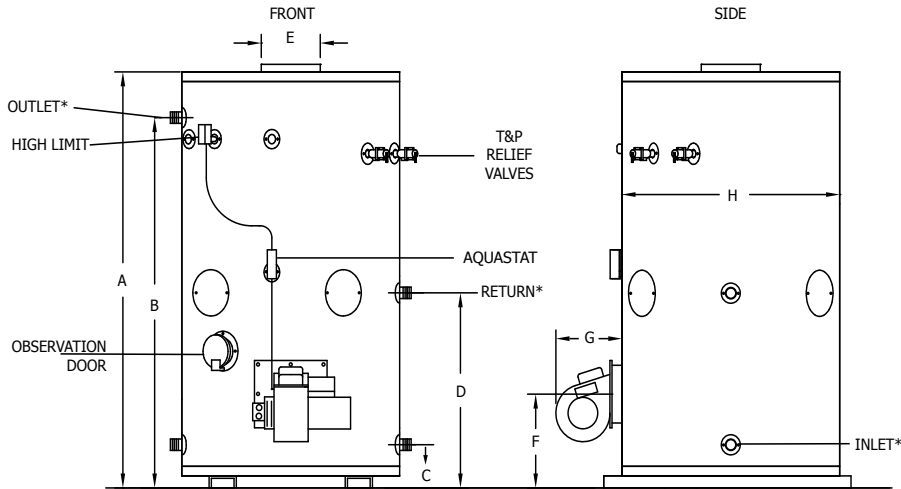

Model	Storage GAL (L)	Rated Input BTU/HR (kW)	Recovery @ Δ 100°F GAL/HR (L/HR) Oil/ Dual Fuel	Recovery Time @ Δ 100°F GAL/HR (L/HR) Oil/ Dual Fuel	Recovery @ Δ 100°F GAL/HR (L/HR) Power Gas	Recovery Time @ Δ 100°F GAL/HR (L/HR) Power Gas	Inlet Pipe Dia. NPT	Outlet Pipe Dia. NPT	Return Pipe Dia. NPT	Dimensions in Inches (cm)								Shipping Weight LBS (kg)**		
										A	B	C	D	E	F	G Oil	G Power Gas		G Dual Fuel	H
150-400	175 (662)	400,000 (117.23)	402 (1,522)	26 min.	393 (1,488)	27 min.	2.00	2.00	2.00	76.00 (193.0)	67.00 (170.2)	8.00 (20.3)	40.00 (101.6)	8.00 (20.3)	18.00 (45.7)	12.00 (30.5)	19.75 (50.2)	29.50 (74.9)	40.00 (101.6)	2,433 (1,104)
150-600	166 (628)	600,000 (175.84)	604 (2,286)	17 min.	589 (2,230)	17 min.	2.00	2.00	2.00	76.00 (193.0)	67.00 (170.2)	8.00 (20.3)	40.00 (101.6)	8.00 (20.3)	18.00 (45.7)	12.00 (30.5)	19.75 (50.2)	29.50 (74.9)	40.00 (101.6)	2,433 (1,104)
150-800	157 (594)	800,000 (234.46)	805 (3,047)	12 min.	785 (2,972)	12 min.	2.00	2.00	2.00	76.00 (193.0)	67.00 (170.2)	8.00 (20.3)	40.00 (101.6)	10.00 (25.4)	18.00 (45.7)	12.00 (30.5)	19.75 (50.2)	29.50 (74.9)	40.00 (101.6)	2,633 (1,194)
200-450	245 (927)	450,000 (131.88)	453 (1,715)	29 min.	442 (1,673)	30 min.	2.00	2.00	2.00	79.00 (200.7)	69.00 (175.3)	8.00 (20.3)	42.00 (106.7)	8.00 (20.3)	19.00 (48.3)	12.00 (30.5)	19.75 (50.2)	29.50 (74.9)	44.00 (111.8)	3,150 (1,429)
200-650	212 (803)	650,000 (190.50)	654 (2,476)	19 min.	638 (2,415)	20 min.	2.00	2.00	2.00	79.00 (200.7)	69.00 (175.3)	8.00 (20.3)	42.00 (106.7)	8.00 (20.3)	19.00 (48.3)	12.00 (30.5)	19.75 (50.2)	29.50 (74.9)	44.00 (111.8)	3,150 (1,429)
200-850	204 (772)	850,000 (249.11)	855 (3,237)	14 min.	835 (3,161)	15 min.	2.00	2.00	2.00	79.00 (200.7)	69.00 (175.3)	8.00 (20.3)	42.00 (106.7)	10.00 (25.4)	19.00 (48.3)	12.00 (30.5)	19.75 (50.2)	29.50 (74.9)	44.00 (111.8)	3,150 (1,429)
200-1150	191 (723)	1,150,000 (337.03)	1,157 (4,380)	10 min.	1,129 (4,274)	10 min.	2.00	2.00	2.00	79.00 (200.7)	69.00 (175.3)	8.00 (20.3)	42.00 (106.7)	12.00 (30.5)	19.00 (48.3)	14.00 (35.6)	19.75 (50.2)	29.50 (74.9)	44.00 (111.8)	3,150 (1,429)
250-800	271 (1026)	800,000 (234.46)	808 (3,059)	20 min.	785 (2,972)	21 min.	2.00	2.00	2.00	86.00 (218.4)	76.00 (193.0)	8.00 (20.3)	40.00 (101.6)	10.00 (25.4)	19.00 (48.3)	12.00 (30.5)	19.75 (50.2)	29.50 (74.9)	48.00 (121.9)	3,850 (1,746)
250-1000	257 (973)	1,000,000 (293.07)	1,017 (3,850)	15 min.	982 (3,717)	16 min.	2.00	2.00	2.00	86.00 (218.4)	76.00 (193.0)	8.00 (20.3)	40.00 (101.6)	12.00 (30.5)	19.00 (48.3)	14.00 (35.6)	19.75 (50.2)	29.50 (74.9)	48.00 (121.9)	4,104 (1,862)
250-1250	247 (935)	1,250,000 (366.34)	1,253 (4,743)	12 min.	1,227 (4,645)	12 min.	2.00	2.00	2.00	86.00 (218.4)	76.00 (193.0)	8.00 (20.3)	40.00 (101.6)	14.00 (35.6)	19.00 (48.3)	14.00 (35.6)	19.75 (50.2)	29.50 (74.9)	48.00 (121.9)	4,149 (1,882)
250-1500	247 (935)	1,500,000 (439.61)	1,527 (5,780)	10 min.	1,473 (5,576)	10 min.	2.00	2.00	2.00	86.00 (218.4)	76.00 (193.0)	8.00 (20.3)	40.00 (101.6)	14.00 (35.6)	19.00 (48.3)	33.75 (88.7)	33.75 (88.7)	33.75 (88.7)	48.00 (121.9)	4,710 (2,136)

\*Nipple not included

\*\*Weight includes burner and controls

**NOTE:** To specify burner type use "E" for oil, "G" for power gas, and "DF" for dual fuel

**Burner Motor does not exceed .75HP**

**T&P valve and brass drain valve factory installed**

**Standard Voltage (all):** 120V, 60 Hz, 1P

**Working Pressure:** 150 psi (1034 kPa); **Test Pressure:** 300 psi (2068 kPa)

All Bock products meet or exceed current ASHRAE standards.

**Warning:** Do not install on combustible flooring. Installation should be in accordance with all national and/or local codes. In the absence of local codes, refer to NFPA 31, NFPA 54.

**Caution:** The recommended maximum hot water temperature setting for normal residential use is 120°F. Bock recommends a tempering valve or anti-scald valve be installed and used according to the manufacturer's directions to prevent scalding.

www.bockwaterheaters.com

110 South Dickinson Street Madison, Wisconsin 53703

Toll Free 800-794-2491 • Phone 608-257-2225 • Fax 608-257-5304



(on selected models)