



OPTiTHERM®

Condensate Neutralizer Kits (Indoor Unit)

Ideal for neutralizing condensate from condensing water heaters operating on natural gas or propane.

The condensate is acidic and has the potential to harm the environment and the sewer system. The Condensate Neutralizer Kit will raise the pH of the condensate to a more neutral level before it is discharged to drain.



- Single Canister for OptiTHERM Indoor Models 125-400,000 BTU (Stock No. 57000)
 - 1.6 Gal/hr (6.05 l/hr) *
- Double Canister for OptiTHERM Indoor Models 500,000 BTU (Stock No. 57002)
 - 4.0 Gal/hr (15.1 l/hr) *
- Prevents acidic condensate from corroding drains and sewer systems
- Neutralized condensate is more environmentally friendly
- Fast and easy installation
- Helps maintain a neutral environment for bacteria in septic systems
- Low profile design for appliances with a near floor condensate drain
- All corrosion resistant materials
- Suitable for use on all types of natural gas and propane appliances
- Includes initial charge of neutralizing agent
- Can be mounted in horizontal or vertical position


* Check with the appliance manufacturer for condensate flowrate.
As a guideline 400,000 BTU/hr at 93% efficiency will produce approximately 1.6 Gal/hr.

Condensate Neutralizer Kit (Single Canister) for OptiTHERM 125-400,000 BTU

SKU#: 57000

Specification: The condensate neutralization capsule shall be Axiom Industries Ltd. model NC-1. System shall include 1 litre (0.26 U.S. gallon) transparent capsule made from corrosion resistant materials with two 3" fill/access openings, 3" inlet and outlet screen, 3/4"-14NPT threaded inlet, 3/4"-14NPT threaded outlet, two 3/4" MNPT x 3/4" FNPT unions, three 3/4" NPT to 1/2" hose barb fittings, 1/2" barbed Y fitting, six hose clamps, 10 ft of 1/2" ID vinyl tubing, two base/wall mounting clamps.

Weight: 4.4lbs/2kg

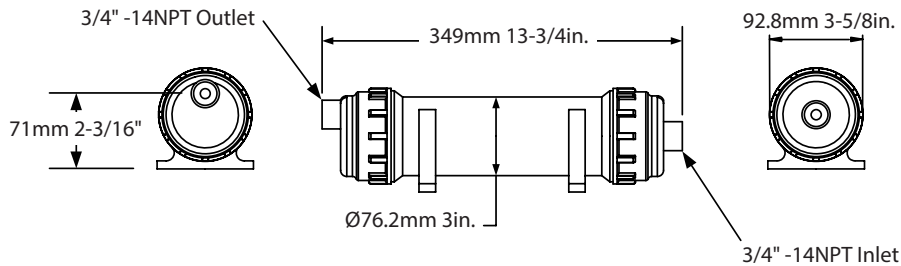


Condensate Neutralizer Kit (Double Canister) for OptiTHERM 500,000 BTU

SKU#: 57002

Specification: The condensate neutralization capsule shall be Axiom Industries Ltd. model NC-2. System shall include 2 litre (0.53 U.S. gallon) transparent capsule made from corrosion resistant materials with two 3" fill/access openings, 3" inlet and outlet screen, 3/4"-14NPT threaded inlet, 3/4"-14NPT threaded outlet, two 3/4" MNPT x 3/4" FNPT unions, three 3/4" NPT to 1/2" hose barb fittings, 1/2" barbed Y fitting, six hose clamps, 10 ft of 1/2" ID vinyl tubing, two base/wall mounting clamps.

Weight: 7.7lbs/3.5kg

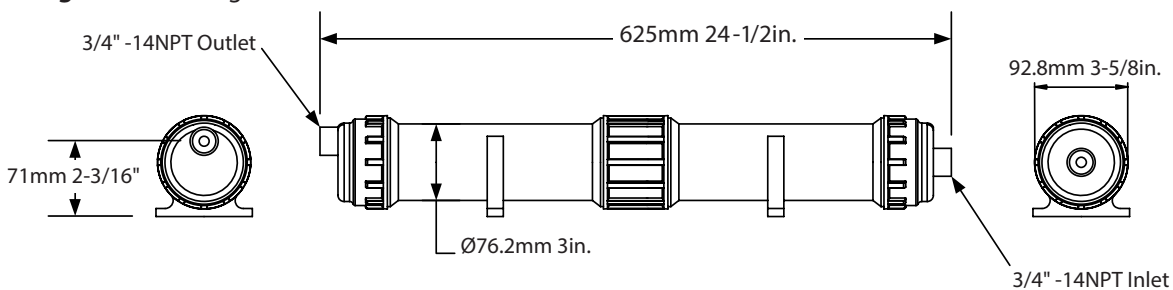

Exceptional Products | 100% Employee Owned | Exceptional Customer and Technical Support

bockwaterheaters.com | 1-800-794-2491

BUILT LIKE A BOCK