




## Heavy-Duty Non-ASME Commercial Storage Tank

*Designed for Use with Boilers, Hot-water Circulation Systems  
and Large Volume Delivery Applications*

■ Five-Year Limited Tank Warranty  
– THE INDUSTRY'S FINEST


- 119 gallon capacity
- Insulated and steel-jacketed glass-lined steel tank
- Glass-fused-to-steel water tank
- Ecomate® insulation
- Steel exterior with powder coat finish
- Factory installed brass drain valve
- Three 2" NPT dielectric nipple connections
- Dual 1" x 60" magnesium anode rods
- 1" NPT T&P valve port
- 3/4" NPT aquastat port
- Made in the USA

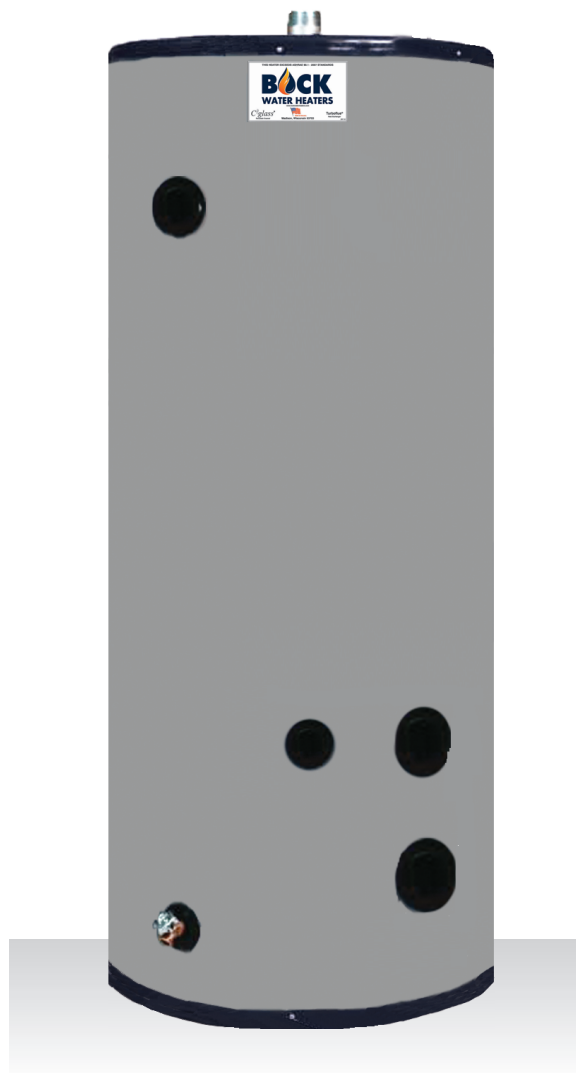

**COMMERCIAL**  
• **STORAGE TANKS** •

WE TAKE WATER HEATERS PERSONALLY

This product is available from:

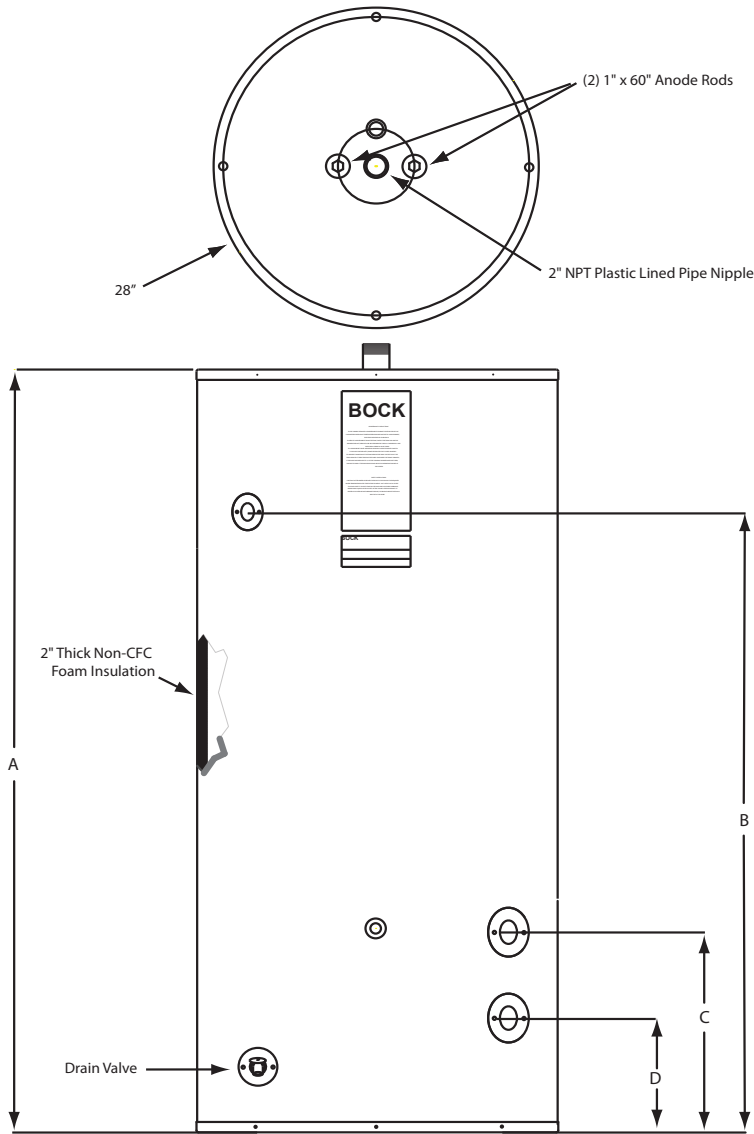

Model	Storage GAL (L)	T&P Relief Valve Conn. NPT	Supply/Return Conn. NPT	Outlet Conn. NPT	Aquastat Conn. NPT	Dimensions in Inches (cm)				Shipping Weight LBS (kg)
						A	B	C	D	
119ST-S	119 (450.46)	1.00"	2.00"	2.00"	.75"	64.25 (163.19)	52.78 (134.06)	14.5 (36.83)	9.5 (24.13)	385 (174.63)

**Warning:** Installation should be in accordance with all national and/or local codes. In the absence of local codes, refer to NFPA 54.

**Caution:** The recommended maximum hot water temperature setting for normal residential use is 120° F. Bock recommends a tempering valve or anti-scald valve be installed and used according to the manufacturer's directions to prevent scalding.



**Pressures (all):** Working Pressure, 150 psi; Testing Pressure, 300 psi