



## ASME Certified Commercial Vertical Jacketed Storage Tanks


■ Five-Year Limited Tank Warranty  
– THE INDUSTRY'S FINEST

- 119/200 gallon capacities
- 125 psi and 150 psi models
- Glass-fused-to-steel water tank
- Ecomate® insulation
- Steel exterior with powder coat finish
- Factory installed brass drain valve
- Twin 1" magnesium anode rods
- Two 1" NPT connections for one or more T&P valves (valves not included)
- Cleanout hand hole
- Made in the USA




**COMMERCIAL**  
• **ASME STORAGE TANKS** •

*WE TAKE WATER HEATERS PERSONALLY*

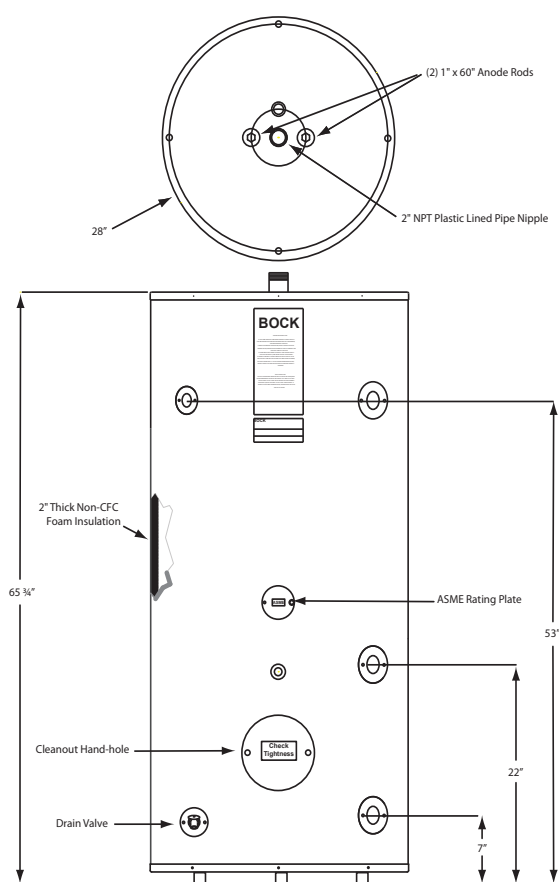

119ST-A-150

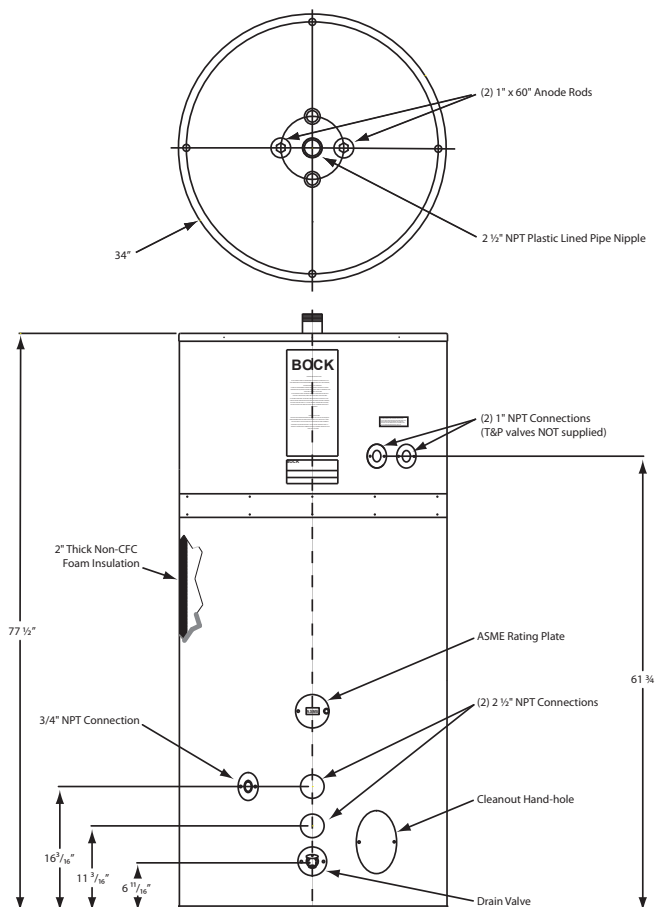

200ST-A-125 and 200ST-A-150

Model	Storage GAL (L)	Working Pressure (PSI)	Dimensions in Inches (cm)		T&P Relief Valve Conn. NPT	Inlet/Return Conn. NPT	Hot Outlet Conn. NPT	Aquastat Conn. NPT	Shipping Weight LBS (kg)
			Diameter	Height/ Length					
119ST-A-150	119 (450.46)	150	28.00 (71.12)	65.75 (167.00)	1 x 1"	2.0"	2.0"	.75"	385 (174.63)
200ST-A-125	200 (757.08)	125	34.00 (86.36)	77.50 (196.85)	2 x 1"	2.5"	2.5"	.75"	872 (395.53)
200ST-A-150	200 (757.08)	150	34.00 (86.36)	77.50 (196.85)	2 x 1"	2.5"	2.5"	.75"	872 (395.53)

**Warning:** Installation should be in accordance with all national and/or local codes. In the absence of local codes, refer to NFPA 54.

**Caution:** The recommended maximum hot water temperature setting for normal residential use is 120°F. Bock recommends a tempering valve or anti-scald valve be installed and used according to the manufacturer's directions to prevent scalding.

**Pressures:** 119ST-A-150 - Working Pressure, 150 psi; Testing Pressure, 300 psi  
 200ST-A-125 - Working Pressure, 125 psi; Testing Pressure, 300 psi  
 200ST-A-150 - Working Pressure, 150 psi; Testing Pressure, 300 psi

