

Oil-Fired Water Heater

#1 Selling in North America

The Popular **BOCK® 32E Leads The Industry** in Energy Efficiency With a **.64 UEF Rating** and **125 Gallons** First Hour Delivery

- 104,000 to 623,000 BTU/hr
- 32 to 113 gallon capacities

Turboflue® High Performance Heat Exchanger:

- Patented helical-fin multi-stage design
- Superior heat conduction and fuel efficiency



Solar Water Heaters

EnviroStor™ SOLAR WATER HEATERS

High Capacity 1.5" Internal Coil Heat Exchanger with Optional 4500W Supplemental Electric Heating Element and Second Coil Heat Exchanger for Auxiliary Heat Source

- 4500W electric heating element (optional)
- 45 to 110 gallon capacities



Commercial Storage Tanks

Designed for Use with Boilers, Hot-water Circulation Systems, Geo-Thermal and Large Volume Delivery Applications

- ASME and Non-ASME
- 30 to 6,141 gallon capacities
- Horizontal and vertical options
- Bare and sprayed-on insulated
- 5 year warranty



Exceptional Products

100% Employee Owned

Exceptional Customer and Technical Support

bockwaterheaters.com | 1-800-794-2491



Product Guide

OPTiTHERM®

Up to 99% Thermal Efficiency by Modulating Fuel Input to Supply Variable Domestic Hot Water Demand

OptiTherm® for Optimal Thermal Efficiency:

- Maximum inputs from 125,000 to 500,000 BTU/hr
- Fully modulating from as low as 60,000 BTU/hr
- 99/100/125 gallon capacities
- Automatic cathodic corrosion protection system
- No sacrificial anode rods
- PVC/CPVC/ABS venting - 240' maximum power vent length
- Glass-fused-to-steel water tank and heat exchanger
- SCAQMD certified Ultra-Low NOx
- Natural gas or propane fuel
- Stealth Quiet™ operation
- Fits through a 36-inch door

Five-Year Limited Tank/Heat Exchanger Warranty

- The Industry's Finest

Turboflue® High Performance Heat Exchanger:

- Patented helical-fin multi-stage design
- Superior heat conduction and fuel efficiency



Maximizes Space in
Climate Acceptable Areas



NEW
ELECTRiTHERM™

BUILT LIKE A BOCK

BUILT LIKE A BOCK

NEW

Commercial Electric

Heavy Duty Digital Electric Water Heaters

- Digital control system
- Inputs from 13.5 to 54 kW
- 50/80/119 gallon capacities
- Conversion kits design certified for field conversion
- Immersion thermostats offer accurate temperature control to 180°F

ELECTRITHERM™



Point of Use Commercial Electric Water Heaters and Accessories

- 6 to 50 gallon capacities
- Suspension platform accessory
- Leak sensor and shutoff valve accessory

nDurance™



Gas/Power Gas/Dual Fuel/Indirect

High BTU Atmospheric Commercial Gas Water Heaters

- 250,000 to 725,000 BTU/hr
- 65 to 100 gallon capacities
- Standard and ASME construction
- Low NOx models available
- Electronic ignition and controls
- Energy Cut Off (E.C.O.)



Power Gas Water Heaters

- 140,100 to 623,000 BTU/hr
- 50 to 113 gallon capacities
- Barometric draft control
- Propane gas available
- Power gas burner with spark ignition, 100% safety shut-off
- Turboflue® High Performance Heat Exchanger



Oil-Fired, Power Gas or Dual-Fuel Commercial Water Heaters


- 400,000 to 1,500,000 BTU/hr
- 157 to 271 gallon capacities
- Wet leg design
- Power gas, oil and dual-fuel burners
- ASME construction
- One-year limited parts warranty
- Turboflue® High Performance Heat Exchanger



Indirect Water Heaters

- 30 to 110 gallon capacities
- 1-1/2" coil diameter
- Two anode rods
- Limited lifetime warranty

SideKick™

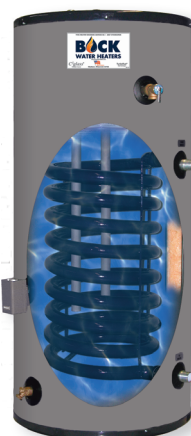

Commercial Gas Water Heaters

EZFIT EASILY REPLACES ANY COMPETITIVE HEATER

Ideal for Large Residences, Small Restaurants, Apartment Buildings, Office Complexes, Dairy Barns, Salons, Barbershops and Many Other Facilities

Five-Year Limited Tank/Heat Exchanger Warranty

- The Industry's Finest

Turboflue® High Performance Heat Exchanger

- Patented helical-fin multi-stage design
- Superior heat conduction and fuel efficiency

Atmospheric Low NOx

- 135,000 to 199,000 BTU/hr
- 75/80/100 gallon capacities
- Natural gas or propane burner
- 120°F to 180°F adjustable electronic thermostat
- Electronic direct spark ignition



Atmospheric

- 199,000 BTU/hr
- 90 gallon capacity
- Natural gas or propane burner
- 120°F to 180°F adjustable electronic thermostat



Internal Coil

- 76,000 BTU/hr
- 75/100 gallon capacities
- Internal coil heat exchanger for radiant applications
- 120°F to 180°F settable temperature
- Natural gas or propane burner



Atmospheric Non-Dampered

- 76,000 BTU/hr
- 75/100 gallon capacities
- 70°F to 180°F settable temperature
- Standing pilot
- Natural gas or propane atmospheric burners




Power Direct Vented

- 76,000 BTU/hr
- 75/100 gallon capacities
- 120°F to 180°F settable temperature
- Natural gas or propane burner
- 3" or 4" PVC, ABS or CPVC venting



Internal Coil Solar/Gas Hybrid

- 76,000 BTU/hr natural gas or propane
- 75/100 gallon capacities
- 120°F to 180°F settable temperature
- Solar-Thermal
- Power direct vent gas with internal coil heat exchanger

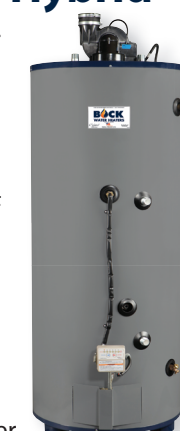

BUILT LIKE A BOCK