



High BTU/Large Volume Oil, Gas, Oil and Natural Gas or LP

Three-Year Limited Tank Warranty

- 400,000 to 1,500,000 BTU/hr
- 157 to 247 gallon capacities
- Wet Leg Design - combustion chamber is surrounded by water on all sides for continuous operation and additional heat transfer
- Glass-fused-to-steel water tank
- Multiple magnesium anode rods
- *From 4 to 11 by model to inhibit corrosion*
- Integrated steel skid for safe and easy movement
- Large handhole cleanouts are standard
- Power gas, oil and dual-fuel burners
- ASME construction
- One-year limited parts warranty

Turboflue® High Performance Heat Exchanger:

- Patented helical-fin multi-stage design
- Superior heat conduction and fuel efficiency

Made in the USA




COMMERCIAL

• HIGH BTU •

BUILT LIKE A BOCK

This product is available from:

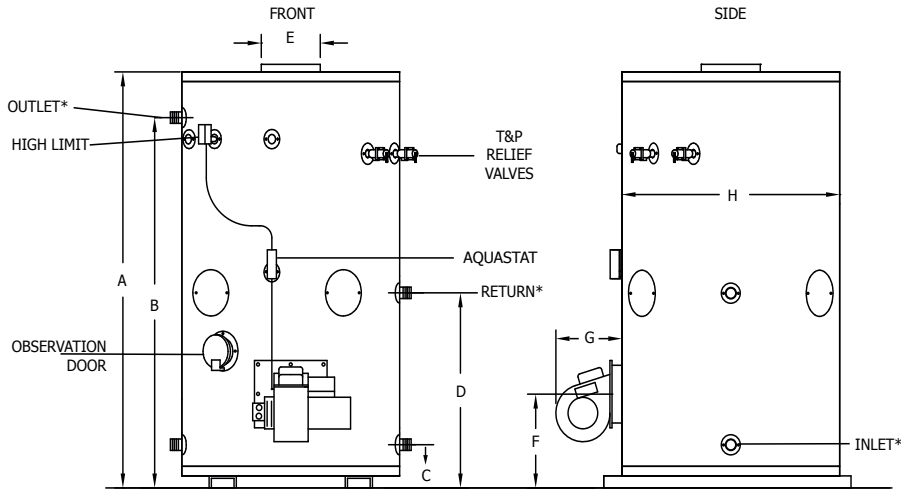

| Model | Storage GAL (L) | Rated Input BTU/HR (kW) | Recovery @ Δ 100°F GAL/HR (L/HR) Oil/ Dual Fuel | Recovery Time @ Δ 100°F (L/HR) Oil/ Dual Fuel | Recovery @ Δ 100°F GAL/HR (L/HR) Power Gas | Recovery Time @ Δ 100°F (L/HR) Power Gas | Inlet Pipe Dia. NPT | Outlet Pipe Dia. NPT | Return Pipe Dia. NPT | Dimensions in Inches (cm) | | | | | | | | Shipping Weight LBS (kg)** | | |
|----------|-----------------|-------------------------|---|---|--|--|---------------------|----------------------|----------------------|---------------------------|---------------|-------------|---------------|--------------|--------------|--------------|--------------|----------------------------|---------------|---------------|
| | | | | | | | | | | A | B | C | D | E | F | G Oil | G Power Gas | | G Dual Fuel | H |
| 150-400 | 157 (594) | 400,000 (117.23) | 402 (1,522) | 26 min. | 393 (1,488) | 27 min. | 2.00 | 2.00 | 2.00 | 76.00 (193.0) | 67.00 (170.2) | 8.00 (20.3) | 40.00 (101.6) | 8.00 (20.3) | 18.00 (45.7) | 12.00 (30.5) | 19.75 (50.2) | 29.50 (74.9) | 40.00 (101.6) | 2,633 (1,194) |
| 150-600 | 157 (594) | 600,000 (175.84) | 604 (2,286) | 17 min. | 589 (2,230) | 17 min. | 2.00 | 2.00 | 2.00 | 76.00 (193.0) | 67.00 (170.2) | 8.00 (20.3) | 40.00 (101.6) | 8.00 (20.3) | 18.00 (45.7) | 12.00 (30.5) | 19.75 (50.2) | 29.50 (74.9) | 40.00 (101.6) | 2,633 (1,194) |
| 150-800 | 157 (594) | 800,000 (234.46) | 805 (3,047) | 12 min. | 785 (2,972) | 12 min. | 2.00 | 2.00 | 2.00 | 76.00 (193.0) | 67.00 (170.2) | 8.00 (20.3) | 40.00 (101.6) | 10.00 (25.4) | 18.00 (45.7) | 12.00 (30.5) | 19.75 (50.2) | 29.50 (74.9) | 40.00 (101.6) | 2,633 (1,194) |
| 200-450 | 191 (723) | 450,000 (131.88) | 453 (1,715) | 29 min. | 442 (1,673) | 30 min. | 2.00 | 2.00 | 2.00 | 79.00 (200.7) | 69.00 (175.3) | 8.00 (20.3) | 42.00 (106.7) | 8.00 (20.3) | 19.00 (48.3) | 12.00 (30.5) | 19.75 (50.2) | 29.50 (74.9) | 44.00 (111.8) | 3,150 (1,429) |
| 200-650 | 191 (723) | 650,000 (190.50) | 654 (2,476) | 19 min. | 638 (2,415) | 20 min. | 2.00 | 2.00 | 2.00 | 79.00 (200.7) | 69.00 (175.3) | 8.00 (20.3) | 42.00 (106.7) | 8.00 (20.3) | 19.00 (48.3) | 12.00 (30.5) | 19.75 (50.2) | 29.50 (74.9) | 44.00 (111.8) | 3,150 (1,429) |
| 200-850 | 191 (723) | 850,000 (249.11) | 855 (3,237) | 14 min. | 835 (3,161) | 15 min. | 2.00 | 2.00 | 2.00 | 79.00 (200.7) | 69.00 (175.3) | 8.00 (20.3) | 42.00 (106.7) | 10.00 (25.4) | 19.00 (48.3) | 12.00 (30.5) | 19.75 (50.2) | 29.50 (74.9) | 44.00 (111.8) | 3,150 (1,429) |
| 200-1150 | 191 (723) | 1,150,000 (337.03) | 1,157 (4,380) | 10 min. | 1,129 (4,274) | 10 min. | 2.00 | 2.00 | 2.00 | 79.00 (200.7) | 69.00 (175.3) | 8.00 (20.3) | 42.00 (106.7) | 12.00 (30.5) | 19.00 (48.3) | 14.00 (35.6) | 19.75 (50.2) | 29.50 (74.9) | 44.00 (111.8) | 3,150 (1,429) |
| 250-800 | 247 (935) | 800,000 (234.46) | 808 (3,059) | 20 min. | 785 (2,972) | 21 min. | 2.00 | 2.00 | 2.00 | 86.00 (218.4) | 76.00 (193.0) | 8.00 (20.3) | 40.00 (101.6) | 10.00 (25.4) | 19.00 (48.3) | 12.00 (30.5) | 19.75 (50.2) | 29.50 (74.9) | 48.00 (121.9) | 4,710 (2,136) |
| 250-1000 | 247 (935) | 1,000,000 (293.07) | 1,017 (3,850) | 15 min. | 982 (3,717) | 16 min. | 2.00 | 2.00 | 2.00 | 86.00 (218.4) | 76.00 (193.0) | 8.00 (20.3) | 40.00 (101.6) | 12.00 (30.5) | 19.00 (48.3) | 14.00 (35.6) | 19.75 (50.2) | 29.50 (74.9) | 48.00 (121.9) | 4,710 (2,136) |
| 250-1250 | 247 (935) | 1,250,000 (366.34) | 1,253 (4,743) | 12 min. | 1,227 (4,645) | 12 min. | 2.00 | 2.00 | 2.00 | 86.00 (218.4) | 76.00 (193.0) | 8.00 (20.3) | 40.00 (101.6) | 14.00 (35.6) | 19.00 (48.3) | 14.00 (35.6) | 19.75 (50.2) | 29.50 (74.9) | 48.00 (121.9) | 4,710 (2,136) |
| 250-1500 | 247 (935) | 1,500,000 (439.61) | 1,527 (5,780) | 10 min. | 1,473 (5,576) | 10 min. | 2.00 | 2.00 | 2.00 | 86.00 (218.4) | 76.00 (193.0) | 8.00 (20.3) | 40.00 (101.6) | 14.00 (35.6) | 19.00 (48.3) | 33.75 (88.7) | 33.75 (88.7) | 33.75 (88.7) | 48.00 (121.9) | 4,710 (2,136) |

*Nipple not included

**Weight includes burner and controls

NOTE: To specify burner type use "E" for oil, "G" for power gas, and "DF" for dual fuel

Burner Motor does not exceed .75HP

T&P valve factory installed

Standard Voltage (all): 120V, 60 Hz, 1P

Working Pressure: 150 psi (1034 kPa); Test Pressure: 300 psi (2068 kPa)

All Bock products meet or exceed current ASHRAE standards.

Warning: Do not install on combustible flooring. Installation should be in accordance with all national and/or local codes. In the absence of local codes, refer to NFPA 31, NFPA 54.

Caution: The recommended maximum hot water temperature setting for normal residential use is 120°F. Bock recommends a tempering valve or anti-scald valve be installed and used according to the manufacturer's directions to prevent scalding.

www.bockwaterheaters.com

110 South Dickinson Street Madison, Wisconsin 53703

Toll Free 800-794-2491 • Phone 608-257-2225 • Fax 608-257-5304



(on selected models)